



# QWIK SHIP

EXPRESS LEAD TIME STANDARD PRODUCTS

Airolite's Qwik Ship program includes a comprehensive portfolio of products and a broad selection of options and finish selections, ensuring on-time and on-budget results with "The Look that Works." Contact your local Airolite representative to determine how Airolite's Qwik Ship program can support your most demanding project completion schedules.

**Best Available  
Manufacturing Lead Time**

MILL FINISH

PAINTED FINISH



## Miami-Dade County Qualified & Florida Code Approved Louvers

Drainable, Sightproof, and Storm Class Louvers

Extruded aluminum with welded or mechanically fastened construction

### MIAMI-DADE COUNTY QUALIFIED:

K8206AMD, K6746MD, K6746MDE, SCH601MD, SCH601MDE  
SCV302MD, SCV501MD, SCV660MD, SCC550MD, SCC901MD

5 DAY

10 DAY

### FLORIDA CODE APPROVED:


K6746X

5 DAY

10 DAY

AMCA Licensed air performance and water penetration ratings (K8206AMD, K6746MD, K6746MDE, K6746X)

AMCA Licensed air performance, water penetration and wind-driven rain ratings (SCH601MD, SCH601MDE, SCV302MD, SCV501MD, SCV660MD, SCC550MD, SCC901MD)

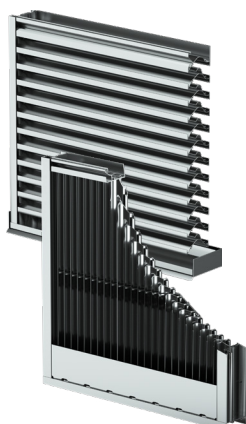

## Storm Class™ Louvers

Designed and rated to provide high volume intake and exhaust ventilation and prevent water penetration under wind-driven rain conditions

Extruded aluminum with welded\* or mechanically fastened construction

### HORIZONTAL BLADES:

SCH201\*, SCH401\*, SCH501\*, SCH601\*

1 DAY

5 DAY

SCC901, SCC550

5 DAY

10 DAY

### VERTICAL BLADES:

SCV302, SCV501

1 DAY

5 DAY

AMCA Licensed air performance, water penetration, and wind-driven rain ratings



## Adjustable and Combination Louvers

Adjustable blades open for controlled ventilation or closed to restrict air leakage and water penetration

Combination louvers yield constant appearance with adjustable blade control and versatility

### EXTRUDED ALUMINUM ADJUSTABLE:

T6796, T6732W, T6636

3 DAY

5 DAY

### EXTRUDED ALUMINUM COMBINATION:

K8204, K8206, K8504, K8506, K8206A

3 DAY

5 DAY

AMCA Licensed air performance and water penetration ratings (T6796, T6732W, K8204, K8206, K8504, K8506, K8206A)

AMCA Licensed air performance rating (T6636)



## Stationary Louvers

Visible or concealed mullions

Extruded aluminum with welded or mechanically fastened construction

### EXTRUDED ALUMINUM:

K604

1 DAY

5 DAY

AMCA Licensed air performance and water penetration ratings



## Drainable Louvers

Visible or concealed mullions

Extruded aluminum with welded or mechanically fastened construction

### EXTRUDED ALUMINUM:

K609HP, K6744, K6746, K6746HP

1 DAY

5 DAY

AMCA Licensed air performance and water penetration ratings



## Narrow Profile Louvers

Visible or concealed mullions

Extruded aluminum with welded or mechanically fastened construction

### EXTRUDED ALUMINUM:

K6772

1 DAY

5 DAY

AMCA Licensed air performance and water penetration ratings



## Sightproof Louvers

Visible or concealed mullions

Drainable or non-drainable blade configurations

Extruded aluminum with welded or mechanically fastened construction

### EXTRUDED ALUMINUM:

K605D

1 DAY

5 DAY

K605

5 DAY

10 DAY

AMCA Licensed air performance and water penetration ratings

# ACCESSORIES, OPTIONS, FINISHES AND SHAPES

Adding accessories may increase lead time

## Accessories and Options:

### Birdscreens (Internal Only)

- Flattened expanded and wire mesh aluminum
- Wire cloth galvanized and stainless

### Insect Screens - Aluminum (Internal Only)

#### Blank-Off Panels

- 0.032 in. (1 mm) aluminum, 1 in. (25 mm) and 2 in. (50 mm) insulated blank-off panels, finished black on exterior only
- 0.063 in. (2 mm) and 0.125 in. (3 mm) aluminum non-insulated blank-off panels, finished mill
- 0.050 in. (2 mm) aluminum non-insulated blank-off panels, finished black on exterior only

#### Clip and Continuous Angles

#### Exterior Flanges

- 1.50 in. (38 mm) flange - standard louver
- 0.75 in. (19 mm) flange - narrow profile louvers

#### Sill Flashing

#### Welded or Mechanically Fastened Construction

## Finishes:

- Standard Kynar 500® finishes
- Standard fluoropolymer finishes
- Standard baked enamel finishes
- Standard Kynar 500® pearlescent finishes
- Standard anodize finishes - color and clear
- Custom color Kynar 500® and baked enamel finishes



Qwik Ship lead times may vary slightly depending on availability of options and accessories.

Custom colors are defined as in-house blends of baked enamel and Kynar 500® only. Reference Airolite's Finishes & Colors brochure. Note: Express Qwik Ship lead times commence upon receipt of color approval.

## Specialty Shapes:

Airolite offers three louvers in triangular configurations on express Qwik Ship lead times.

### Louver Models

- K604
- K6744
- K6746

### Triangular Shape Configurations

- Pyramid
- Slope top
- House
- Triangle

### Size Limitations

- Max size mill finish:
  - 150 x 84 in. or 84 x 120 in. (1 section)
  - 3810 x 2133 mm or 2133 x 3048 mm (1 section)
- Max size painted:
  - 150 x 72 in. or 72 x 120 in. (1 section)
  - 3810 x 1829 or 1829 mm x 3048 mm (1 section)